


## Dehydrátory pájecí tužkové

Univerzální FC - s náplní HX9, vhodné pro R-12, R-134a, R-404A, 507 a R-600a.

Typ	Náplň g	Délka L mm	Vývody A-C-B ø mm	Registr. číslo
XS 210	10	123	2 x 6,2 + 2,5	7240000.720 C
XS 220	20	150	2 x 6,2 + 2,2	7240000.725 C
XS 225	25	154	2 x 6,2 + 2,5	7240000.726 C

Typ GR – DENA Itálie s náplní HX9, vhodné pro R-12, R-134a, R-404A, 507 a R-600a.

GR.10 UN	10	125	2 x 6,2 + 2,5	724000.720
GR.15 UN	15	125	2 x 6,2 + 2,5	724000.718
GR.20 UN	20	155	2 x 6,2 + 2,5	724000.725
GR.30 UN	30	155	2 x 6,2 + 6,2	724000.716
GR.30 UN	30	155	2 x 6,2 + 3,2	724000.730
GR.30 UN	50	175	2 x 6,2 + 6,2	724000.750

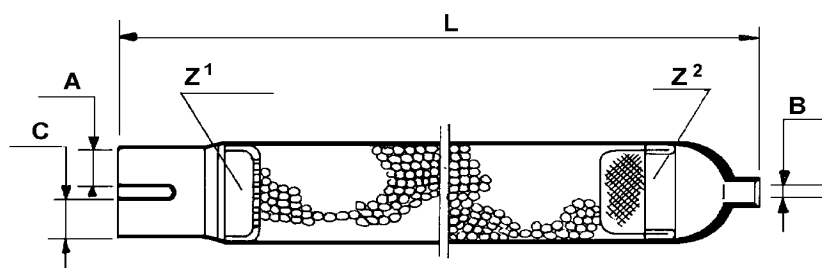

## Dehydrátory sací – KENMORE

BURN OUT FILTER (filtry pro spáleniny)

Typ	Objem cm <sup>3</sup>	Vývody		Délka mm	Registr. číslo
		inch	mm		
WSL – 163 S	262	3/8	10	154	7242000.800
WSL – 164 S	262	1/2	12	154	7242000.801
WSL – 305 S	492	5/8	16	202	7242000.805
WSL – 165 S	492	5/8	16	202	7242000.806
WSL – 166 S	262	3/4	18	167	7242000.804
WSL – 167 S	262	7/8	22	179	7242000.803
WSL – 307 S	492	7/8	22	214	7242000.808
WSL – 419 S	672	1 1/8	28	270	7242000.807
WSL – 7513 S	1 229	1 5/8	42	367	7242000.810
WSL – 7511 S	1 229	1 3/8	35	360	7242000.812

