

## Kondenzátory trubkové s ventilátorem – FC


### Řada CD s ventilátorem a krytem.

Napájení ventilátorů 240 V/50 Hz

Typ	Chladicí výkon W $\Delta T$ 15 K	Průměr vrtule mm	Plocha m <sup>2</sup>	Průtok vzduchu m <sup>3</sup> /hod.	Rozměry A-B-C mm	Registr. číslo
CD - 2	600	200	2,0	410	280x240x100	7154000.303C
CD - 3,4	1 000	200	3,4	410	280x240x100	7154000.304C
CD - 4,4	1 300	250	4,4	750	330x280x100	7154000.307C
CD - 5,4	1 600	300	5,4	1 350	400x340x100	7154000.305C
CD - 7,0	2 000	300	7,0	1 350	400x340x135	7154000.306C

Napájení ventilátorů 400 V/50 Hz

CD - 8,4	2 300	350	8,4	3 100	500x430x130	7154000.308C
CD - 11,5	3 500	350	11,5	3 100	480x430x180	7154000.309C
CD - 15	4 400	350	15	3 100	550x480x180	7154000.311C
CD - 18	5 200	400	18	4 500	590x530x180	7154000.310C
CD - 22	6 400	400	22	4 500	590x530x180	7154000.312C
CD - 25	8 100	400	25	4 500	750x680x180	7154000.313C
CD - 33	11 200	2x 350	33	6 200	900x480x200	7154000.314C
CD - 43	14 800	2x 400	43	9 000	1 015x680x180	7154000.315C
CD - 48	17 500	2x 400	48	9 000	1 250x630x200	7154000.316C
CD - 55	19 200	2x 400	55	9 000	1 250x730x200	7154000.317C
CD - 70	20 500	4x 350	70	12 400	1 250x830x200	7154000.318C

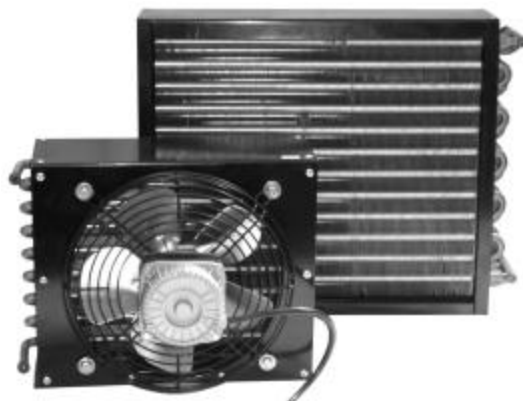

## Kondenzátory trubkové s ventilátorem – KTM

Typ	Chladicí výkon W $\Delta T$ 15 K	Motor výkon W / vrtule $\varnothing$ mm	Rozměry A-B-C-D mm	Registr. číslo
KTK 0570	570	5/172	243x203x63x173	7154000.300
KTK 0680	680	5/172	243x203x63x193	7154000.301
KTK 0750	750	5/172	243x203x63x193	7154000.302
KTK 0860	860	7/200	273x228x67x177	7154000.303
KTK 1000	1 000	10/200	273x228x67x197	7154000.304
KTK 1500	1 500	10/230	303x253x73x203	7154000.305
KTK 1900	1 900	16/254	333x278x76x206	7154000.306

