


7.1 Dehydrátory pájecí tužkové (chladničkové)

Univerzální FC - s náplní HX9, vhodné pro R-12, R-134a, R-404A, 507 a R-600a.

| Typ | Náplň g | Délka L mm | Vývody A-C-B ø mm | Registr. číslo |
|--------|---------|------------|----------------------|----------------|
| XS 210 | 10 | 123 | 2 x 6,2 + 2,5 | 7240000.720C |
| XS 220 | 20 | 150 | 2 x 6,2 + 2,2 | 7240000.725C |
| XS 225 | 25 | 154 | 2 x 6,2 + 2,5 | 7240000.726C |

Typ GR – DENA Itálie s náplní HX9, vhodné pro R-12, R-134a, R-404A, 507 a R-600a.

| | | | | |
|--------|----|-----|---------------|-------------|
| XS 315 | 15 | 125 | 2 x 6,2 + 2,5 | 724000.720C |
| XS 320 | 20 | 125 | 2 x 6,2 + 2,5 | 724000.718C |
| XS 330 | 30 | 155 | 2 x 6,2 + 2,5 | 724000.725C |
| XS 330 | 30 | 155 | 2 x 6,2 + 6,2 | 724000.716C |
| XS 350 | 50 | 155 | 2 x 6,2 + 3,2 | 724000.730C |

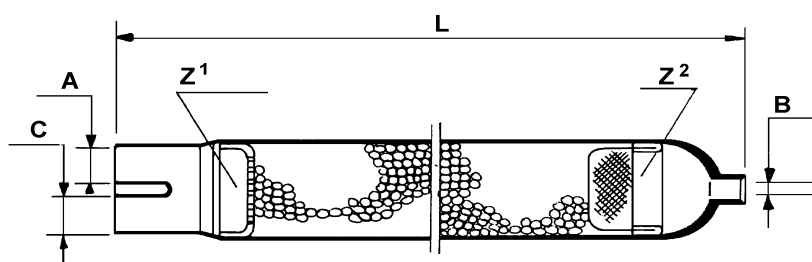

Dehydrátory sací – KENMORE

BURN OUT FILTER (filtry pro spáleniny)

| Typ | Objem cm ³ | Vývody | | Délka mm | Registr. číslo |
|--------------|--------------------------|--------|----|-------------|----------------|
| | | inch | mm | | |
| WSL – 163 S | 262 | 3/8 | 10 | 154 | 7242000.800 |
| WSL – 164 S | 262 | 1/2 | 12 | 154 | 7242000.801 |
| WSL – 305 S | 492 | 5/8 | 16 | 202 | 7242000.805 |
| WSL – 165 S | 492 | 5/8 | 16 | 202 | 7242000.806 |
| WSL – 166 S | 262 | 3/4 | 18 | 167 | 7242000.804 |
| WSL – 167 S | 262 | 7/8 | 22 | 179 | 7242000.803 |
| WSL – 307 S | 492 | 7/8 | 22 | 214 | 7242000.808 |
| WSL – 419 S | 672 | 1 1/8 | 28 | 270 | 7242000.807 |
| WSL – 7513 S | 1 229 | 1 5/8 | 42 | 367 | 7242000.811 |
| WSL – 7511 S | 1 229 | 1 3/8 | 35 | 360 | 7242000.812 |

